

BIRCH, STEWART, KOLASCH & BIRCH, LLP

TERRELL C. BIRCH
RAYMOND C. STEWART
JOSEPH A. KOLASCH
JAMES M. SLATTERY
BERNARD L. SWEENEY*
MICHAEL K. MUTTER
CHARLES GORENSTEIN
GERALD M. MURPHY, JR.
LEONARD R. SVENSSON
TERRY L. CLARK
ANDREW D. MEIKLE
MARC S. WEINER
JOE MCKINNEY MUNCY
ROBERT J. KENNEY
DONALD J. DALEY
JOHN W. BAILEY
JOHN A. CASTELLANO, III
GARY D. TACIURA

OF COUNSEL
HERBERT M. BIRCH (1905-1996)
ELLIOT A. GOLDBERG*
WILLIAM L. GATES*
EDWARD H. VALANCE
RUPERT J. BRADY (RET.)*
F. PRINCE BUTLER
FRED S. WHISENANT

*ADMITTED TO A BAR OTHER THAN VA

INTELLECTUAL PROPERTY LAW
8110 GATEHOUSE ROAD
SUITE 500 EAST
FALLS CHURCH, VA 22042-1210
U S A
(703) 205-8000

FAX: (703) 205-8050
(703) 698-8590 (G IV)

e-mail: mailroom@bskb.com
web: <http://www.bskb.com>

CALIFORNIA OFFICE*
COSTA MESA, CALIFORNIA

THOMAS S. AUCHTERLONIE
JAMES T. ELLER, JR.
SCOTT L. LOWE
MARK J. NUJELL, Ph.D.
D. RICHARD ANDERSON
PAUL C. LEWIS
MARK W. MILSTEAD*
RICHARD J. GALLAGHER
JAYNE M. SAYDAH*

REG. PATENT AGENTS:
FREDERICK R. HANDREN
MARYANNE ARMSTRONG, Ph.D.
MAKI HATSUMI
MIKE S. RYU
CRAIG A. MCROBBIE
GARTH M. DAHLEN, Ph.D.
LAURA C. LUTZ
ROBERT E. GOOZNER, Ph.D.
HYUNG N. SOHN
MATTHEW J. LATTIG
ALAN PEDERSEN-GILES
C. KEITH MONTGOMERY
TIMOTHY S. WYCKOFF
KRISTI L. RUPERT, Ph.D.
LARRY T. HUME
ALBERT LEE
HRAIR A. SAYADIAN, Ph.D.

jc772 U.S. PTO
09/08/00

Date: September 8, 2000

Docket No.: 3430-0134P

jc690 U.S. PTO
09/05/06
09/08/00

BOX PATENT APPLICATION

Assistant Commissioner for Patents
Washington, DC 20231

Sir:

As authorized by the inventor(s), transmitted herewith for filing is a patent application applied for on behalf of the inventor(s) according to the provisions of 37 C.F.R. § 1.41(c).

Inventor(s): SON, Hyeon-Ho; MOON, Jong-Weon

For: BACKLIGHT DEVICE FOR LIQUID CRYSTAL DISPLAY DEVICE

Enclosed are:

- ☒ A specification consisting of ten (10) pages
- ☒ Six (6) sheet(s) of formal drawings
- ☐ Certified copy of
- ☒ Executed Declaration in accordance with 37 C.F.R. § 1.64 will follow
- ☐ A statement to establish small entity status under 37 C.F.R. § 1.9 and 37 C.F.R. § 1.27
- ☐ Preliminary Amendment
- ☒ Information Sheet

- ☐ Information Disclosure Statement, PTO-1449 and reference(s)
- ☐ Other: _____

The filing fee has been calculated as shown below:

			LARGE ENTITY	SMALL ENTITY
BASIC FEE			\$690.00	\$345.00
	NUMBER FILED	NUMBER EXTRA	RATE FEE	RATE FEE
TOTAL CLAIMS	4-20=	0	x 18 = \$0.00	x 9= \$0.00
INDEPENDENT CLAIMS	1-3=	0	x 78 = \$0.00	x39= \$0.00
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED			+ \$260.00	+ \$130.00
TOTAL			\$690.00	\$0.00


- ☒ The application transmitted herewith is filed in accordance with 37 C.F.R. § 1.41(c). The undersigned has been authorized by the inventor(s) to file the present application. The original duly executed declaration together with the surcharge will be forwarded in due course.
- ☒ A check in the amount of \$690.00 to cover the filing fee is enclosed.
- ☐ Please charge Deposit Account No. 02-2448 in the amount of \$0.00. A triplicate copy of this transmittal form is enclosed.
- ☒ Please send correspondence to:

BIRCH, STEWART, KOLASCH & BIRCH, LLP or Customer No. 2292
P.O. Box 747
Falls Church, VA 22040-0747
Telephone: (703) 205-8000

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. § 1.16 or under 37 C.F.R. § 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By 
Terry L. Clark, #32,644 Reg. No. 42,786

TLC/dpt
3430-0134P

P.O. Box 747
Falls Church, VA 22040-0747
(703) 205-8000

Attachments

(Rev. 04/19/2000)

IN THE U.S. PATENT AND TRADEMARK OFFICE

I N F O R M A T I O N S H E E T

Applicant: SON, Hyeon-Ho
 MOON, Jong-Weon

Application No.:

Filed: September 8, 2000

For: BACKLIGHT DEVICE FOR LIQUID CRYSTAL DISPLAY DEVICE

Priority Claimed:

COUNTRY	DATE	NUMBER
Korea	09/08/99	1999-38155


Send Correspondence to: BIRCH, STEWART, KOLASCH & BIRCH, LLP
 P. O. Box 747
 Falls Church, Virginia 22040-0747
 (703) 205-8000

The above information is submitted to advise the USPTO of all relevant facts in connection with the present application. A timely executed Declaration in accordance with 37 CFR 1.64 will follow.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By


TERRY L. CLARK

Reg. No. 32,644

P. O. Box 747

Falls Church, VA 22040-0747

/dpt

(703) 205-8000

Backlight Device for Liquid Crystal Display

Cross Reference

This application claims the benefit of Korean Patent Application No. 1999-38155, filed on September 8, 1999, under 35 U.S.C. § 119, the entirety of which is hereby incorporated by reference.

Background of the invention

Field of the invention

The present invention relates to a backlight device, and more particularly, to a backlight device for use in a liquid crystal display (LCD) device.

Description of Related Art

Fig. 1 shows a conventional backlight device for use in an LCD device. As shown in Fig. 1, the conventional backlight device 100 includes a light source 10, a U-shaped lamp holder 15 having a lamp reflector 16, a light waveguide plate 40, a reflector 50, and a prism sheet 20. The light source 10 is located adjacent to an end 40a of the light waveguide plate 40, and most parts of the light source 10 are surrounded by the lamp holder 15. The end 40a constitutes a surface through which the incident light from the light source 10 is emitted. The prism sheet 20 is arranged on a front surface 40b of the light wave guide plate 40, and the reflector 50 is located under a bottom surface 40c of the light wave guide plate 40.

The emitted light from the light source 10 directs toward the surface 40a of the light waveguide plate 40 by the lamp reflector 16 and then directs either toward a prism sheet 20 or a reflector 50. The light reflected by the reflector 50 is emitted toward the observer through a prism sheet 20, and a liquid crystal panel (not shown) in the form of an information.

Fig. 2 is a graph illustrating brightness with respect to an angle of light passing

through the prism sheet. As shown in Fig. 2, brightness distribution is discursive. In other words, light passing through the prism sheet 20 is not well collimated. As a result, light collimating efficiency is bad, and collimating loss takes place at portions "A". In addition, in the conventional back light device of such a structure, it is not easy to narrow an angle of light passing through the prism sheet within a desirable angle range, for example from - 40 degree to + 40 degree.

For the foregoing reasons, there is a need for a back light device having a high light collimating efficiency.

SUMMARY OF THE INVENTION

To overcome the problem described above, preferred embodiments of the present invention provide a back light device having a high light collimating efficiency.

In order to achieve the above object, the preferred embodiment of the present invention provides a back light device for a liquid crystal display device, including: a light source providing light; a light waveguide plate 40 guiding light from the light source, having an emitting surface, a front surface and a bottom surface, the emitting surface adjacent to the light source; a reflector arranged under the bottom surface of the light wave guide plate, reflecting light; and at least one cholesteric liquid crystal (CLC) film arranged over the front surface of the light wave guide plate, collimating light.

The CLC film has one-layered structure of a right- or a left handed CLC layer, the right- and left handed CLC layer selectively reflect a right- and a left-handed circularly polarized light, respectively. Or the CLC film has a dual-layered structure of a right- and a left handed CLC layer, the right- and left handed CLC layer selectively reflect a right- and a left-handed circularly polarized light, respectively. The back light

device further includes a prism sheet arranged between the CLC film and the front surface of the light wave guide plate.

By using the back light device according to the preferred embodiment of the present invention, the light collimating efficiency and brightness can be improved.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention and the advantages thereof, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, in which like reference numerals denote like parts, and in which:

Fig. 1 shows a conventional backlight device for use in a LCD device;

Fig. 2 is a graph illustrating brightness with respect to an angle of light passing through a prism sheet;

Fig. 3 is a cross sectional view illustrating a back light device according to the preferred embodiment of the present invention;

Fig. 4 shows a principle that the CLC film 30 collimates light according to the preferred embodiment of the present invention;

Fig. 5A is a graph illustrating a reflectance with respect to a wavelength of light vertically incident on a cholesteric liquid crystal (CLC) film according to the preferred embodiment of the present invention;

Fig. 5B is a graph illustrating a reflectance with respect to a wavelength of light non-vertically incident on the CLC film;

Fig. 6 is a graph illustrating brightness with respect to an angle of light passing through the CLC film;

Figs. 7, 8 and 9 are cross sectional views illustrating modifications of the back light device according to the preferred embodiment of the present invention;

Fig. 10 is a graph illustrating brightness with respect to a wavelength of spectrum; and

Fig. 11 is a cross sectional view illustrating another modification of the back light device according to the preferred embodiment of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Reference will now be made in detail to a preferred embodiment of the present invention, example of which is illustrated in the accompanying drawings.

Fig. 3 is a cross sectional view illustrating a back light device according to the preferred embodiment of the present invention. As shown in Fig. 3, the back light device includes a light source 10, a U-shaped lamp holder 15 having a lamp reflector 16, a light waveguide plate 40, a reflector 50, and a cholesteric liquid crystal (CLC) film 30. The light source 10 is located adjacent to an end 40a of the light waveguide plate 40, and most parts of the light source 10 are surrounded by the lamp holder 15. The end 40a constitutes a surface through which the incident light from the light source 10 is emitted. The CLC film 30 is arranged on a front surface 40b of the light wave guide plate 40, and the reflector 50 is located under a bottom surface 40c of the light wave guide plate 40.

The CLC film 30 serves to collimat emitting light from the light source 10 and preferably has a dual-layered structure of right-handed and left-handed CLC layers 30a and 30b. Since direction vector of the liquid crystal is helical in cholesteric state, the CLC film 30 reflects only light that is same in helical director and satisfies Bragg

reflection condition. In other words, the right-handed CLC layer 30a reflects only a right-handed circularly polarized light, and the left-handed CLC layer 30b reflects only a left-handed circularly polarized light. Using this principle, lost light can be restored, thereby improving the light collimating efficiency and brightness. The CLC film 30 may have one-layered structure of either the right- or the left-handed CLC layer. However, since light has a right-handed circularly polarized light and a left-handed circularly polarized light, it is preferable that the CLC film 30 has a dual-layered structure of the right- and the left-handed CLC layers 30a and 30b.

Fig. 4 shows a principle that the CLC film 30 collimates light. As shown in Fig. 3, a left-handed circularly polarized light R1 incident within a certain angle, which has a wavelength less than 780 nm, passes through the left-handed CLC layer 30b, and a left-handed polarized light R2 incident out of a certain angle, which has a wavelength less than 780 nm, is reflected. The left-handed polarized light R2 incident out of a certain angle is reflected again by the light wave guide plate 40 or a reflector (not shown) and directs toward the left-handed CLC layer 30b. It is repeated until the left-handed polarized light R2 incident out of a certain angle becomes light incident within a certain angle to pass through the CLC layer 30b.

Fig. 5A is a graph illustrating a reflectance with respect to a wavelength of light vertically incident on the CLC film. "R" denotes a reflectance, and " λ_i " denotes a wavelength of vertically incident light. The CLC film 30 also serves to transmit only light of a certain wavelength by controlling a helical pitch. The wavelength of light vertically incident on the CLC film 30 can be obtained by the following formula: $\lambda_o = P(n_o + n_e)/2$. In the formula, " λ_o " is a wavelength of vertically incident light, "P" is a helical pitch, " n_o " is an ordinary refractive index, and " n_e " is an extraordinary refractive

index. Therefore, by controlling a helical pitch of the CLC film 30, an ideal visible ray having a wavelength of from 380 nm to 780 nm can be transmitted, as shown in Fig. 4. By controlling a helical pitch of the CLC film 30, it is also possible for the CLC film 30 to transmit a wavelength of vertically incident light less than 780 nm in light of a prism sheet.

Fig. 5B is a graph illustrating a reflectance with respect to a wavelength of light obliquely incident on the CLC film. "R" is a reflectance, and " λ_α " is a wavelength of obliquely incident light with a certain angle " α ". A wavelength of obliquely incident light with a certain angle " α " can be obtained by the following formula: " λ_α " = $\lambda_0 \cos[\sin^{-1}\{2\sin\alpha/(n_0+n_e)\}]$. In order to reflect a visible ray of from 380 nm to 780 nm and transmit a wavelength of light greater than 780 nm, it is preferable that an average refractive index " $(n_0+n_e)/2$ " of the CLC film 30 is as small as possible.

As described above, the CLC film 30 according to the preferred embodiment of the present invention selectively reflects light with a wavelength of more than 780 nm. However, it is also possible to selectively reflect light with a wavelength of more than 600 nm by controlling a helical pitch of the CLC film 30 so that only a wavelength of an ideal visible ray generated from the back light device may be transmitted.

Fig. 6 is a graph illustrating brightness with respect to an angle of light passing through the CLC film 30. As shown in Fig. 6, by arranging the CLC film 30 having the right- and left-handed CLC layers 30a and 30b, brightness distribution can be concentrated within a range between - 40 degree and + 40 degree.

The back light device according to the preferred embodiment of the present invention may further include a prism sheet 20 as shown in Fig. 7.

The back light device according to the preferred embodiment of the present

invention may further include a plurality of the CLC films 30 without or with the prism sheet 20 as shown in Figs. 8 and 9, respectively.

Further, one of the right- and left-handed CLC layers 30a and 30b may be constructed to selectively reflect all the wavelength range of from 400 nm to 1000 nm, and the other may be constructed to selectively reflect vertically incident light with a wavelength of more than 600 nm. As a result, since only one of the right- and the left-handed circularly polarized lights is transmitted, a light collimating efficiency and brightness can be improved. Besides, it is possible to additionally add the CLC layer that selectively reflect vertically incident light with a wavelength of from 480 nm to 530 nm and selectively reflect vertically incident light with a wavelength of from 560 nm to 610 nm in the light of spectrum of the back light device shown in Fig. 10. Therefore, a color spot, which may occur when the plurality of the CLC films are arranged and so vertically incident light with a wavelength of more than 600 nm is transmitted, can be prevented, and the light collimating efficiency can be improved as narrow as a range between -30 degree and $+30$ degree.

Fig. 11 shows a modified backlight device according to the preferred embodiment of the present invention. As shown in Fig. 11, at least one CLC film 30 may be arranged on the end 40a of the light wave guide plate 40 adjacent to the light source 15. By doing this, emitting light from the light source 10 can be collimated. Therefore, when incident light within a certain angle (a range between about -30 degree and about $+30$ degree) directs into the light wave guide plate 40, it is easy to design the light wave guide plate 40 to guide light in a desirable distribution.

As described above, by using the back light device according to the preferred embodiment of the present invention, the light collimating efficiency and brightness can

be improved.

While the invention has been particularly shown and described with reference to preferred embodiments thereof, it will be understood by those skilled in the art that the foregoing and other changes in form and details may be made therein without departing from the spirit and scope of the invention.

What is claimed is:

1. A back light device for a liquid crystal display device, comprising:

a light source providing light;

a light waveguide plate 40 guiding light from the light source, having an emitting surface, a front surface and a bottom surface, the emitting surface adjacent to the light source;

a reflector arranged under the bottom surface of the light wave guide plate, reflecting light; and

at least one cholesteric liquid crystal (CLC) film arranged over the front surface of the light wave guide plate, collimating light.


2. The back light device of claim 1, wherein the CLC film has one-layered structure of a right- or a left handed CLC layer, the right- and left handed CLC layer selectively reflect a right- and a left-handed circularly polarized light, respectively.

3. The back light device of claim 1, wherein the CLC film has a dual-layered structure of a right- and a left handed CLC layer, the right- and left handed CLC layer selectively reflect a right- and a left-handed circularly polarized light, respectively.

4. The back light device of claim 1, further comprises, a prism sheet arranged between the CLC film and the front surface of the light wave guide plate.


ABSTRACT OF THE DISCLOSURE

The present invention discloses a back light device for a liquid crystal display device, including: a light source providing light; a light waveguide plate 40 guiding light from the light source, having an emitting surface, a front surface and a bottom surface, the emitting surface adjacent to the light source; a reflector arranged under the bottom surface of the light wave guide plate, reflecting light; and at least one cholesteric liquid crystal (CLC) film arranged over the front surface of the light wave guide plate, collimating light.

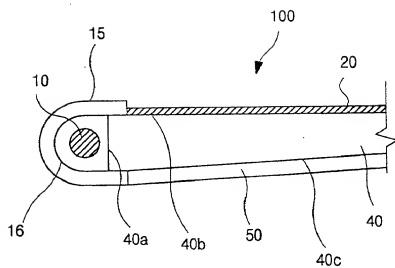

(Related Art)

Fig 1

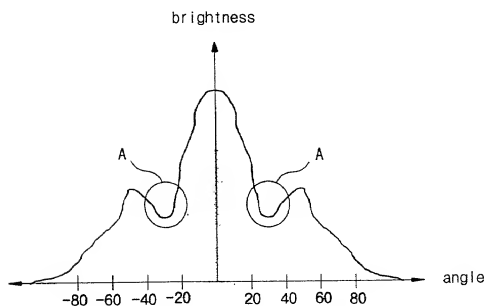

(Related Art)

Fig 2

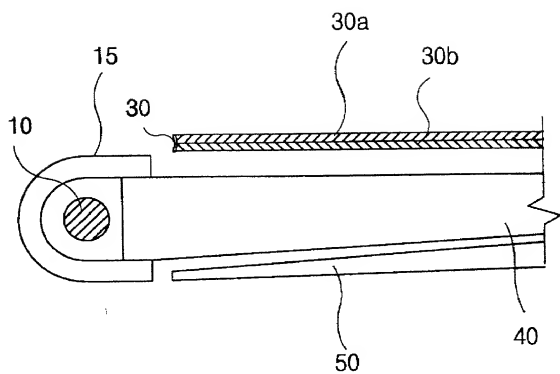


Fig 3

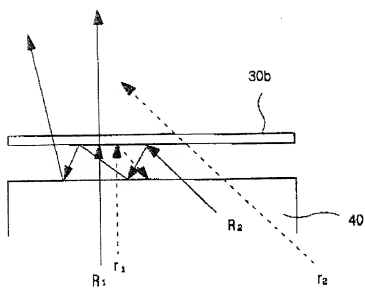


Fig 4

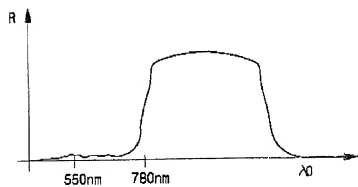


Fig 5A




Fig 5B

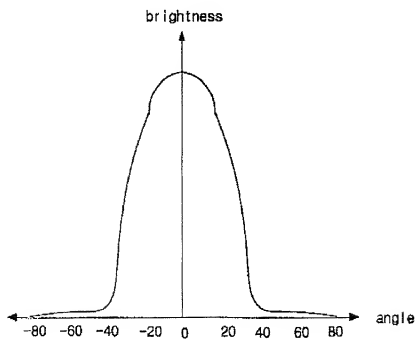


Fig 6

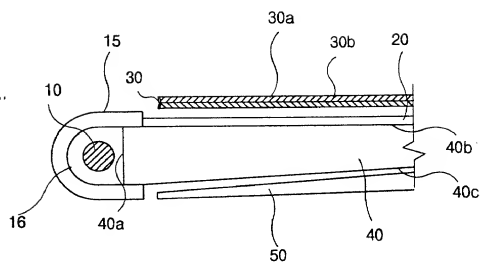


Fig 7

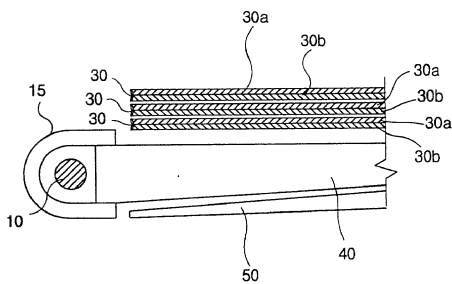


Fig 8

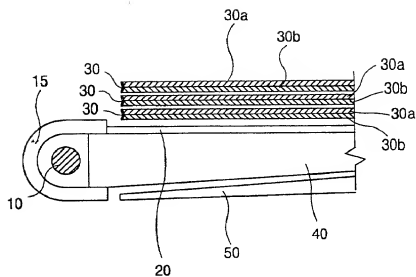


Fig 9

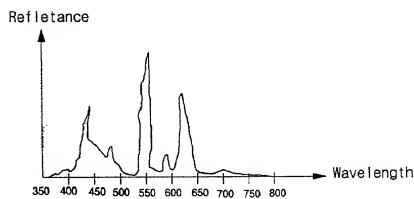


Fig 10




Fig 11